

## Long sensing range for small object detection

### E3NX-FA Smart Fiber Amplifier Units




- Intuitive operation and easy setup with common buttons
- Greater visibility with high-contrast displays
- Reduced downtime with Dynamic Power Control

Reliable

### Powerful coupling module

The lens and reflector focus light beams for uniform brightness.

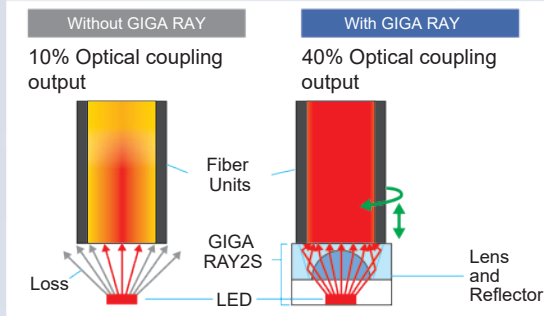

GIGA RAY2S


PAT

### Smart Noise Reduction

Accurately capture signals with Smart Noise Reduction

2.5 Times


By increasing the number of samples and the threshold margin, the influences of noise are greatly reduced.

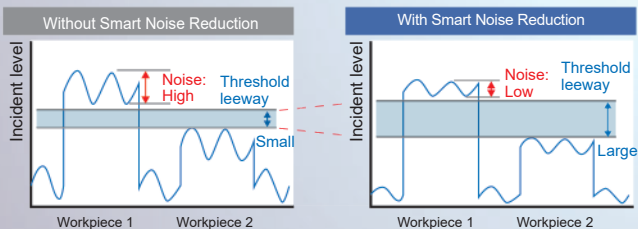

N-Core

### High-speed, high precision

Adjust the light intensity to accurately detect fast-moving workpieces. A response time of 30μs can be achieved in high-speed mode.



### Long Sensing Distance

6 m

For E32-LT11 Fiber Unit with a fiber length of 3.5 m

### Small Object Detection


0.3 μm dia.

E32-D11R Fiber Unit

# Easily handle a wide range of applications with the press of a single button




## Smart Tuning Settings

PAT

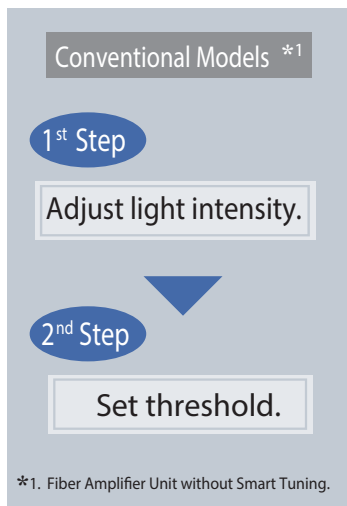

Automatic adjustment to optimum incident level

Wide light intensity adjustment range from transparent objects to black workpieces

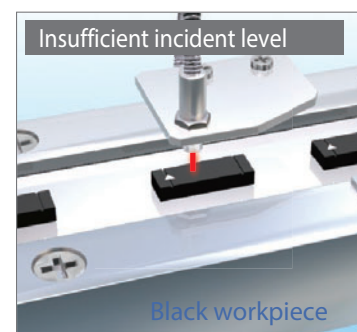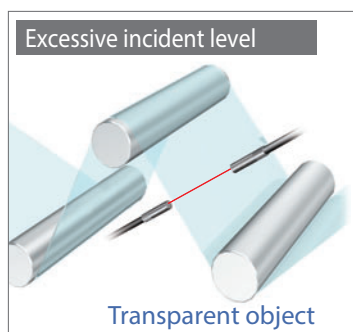

Wider light intensity adjustment range of 40,000 times (Conventional models\*2: 2,000 times)

You can automatically adjust the light intensity to an optimum value for stable detection even with saturated or insufficient incident light.

\*2. E3X-HD

Ultra-reliable

## Two decision support functions


Visual displays of the passing time and difference in incident levels.

Solution viewer **PAT**



### Selecting fiber units


You can make a quantitative decision without special skills.

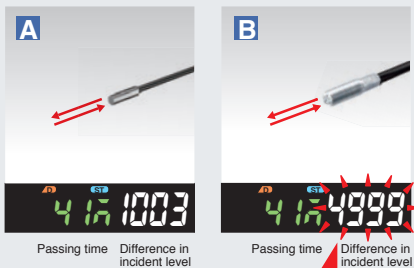

The difference in incident level is large, so use B.

### Setting optimum thresholds and modes

You can see the passing time and difference in incident levels to facilitate manual setup.

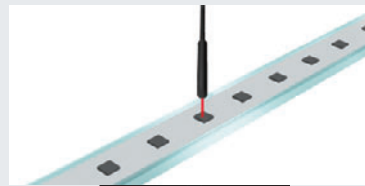


The passing time is "13 ms", so it is OK with Standard Mode.

The incident light level difference is 4,000 when the level is 5,000 with a workpiece, so a threshold of 3,000 is OK.

Visual information for fast workpieces

Change finder **PAT**

You can confirm changes in displayed values for fast workpieces to accurately set the threshold.

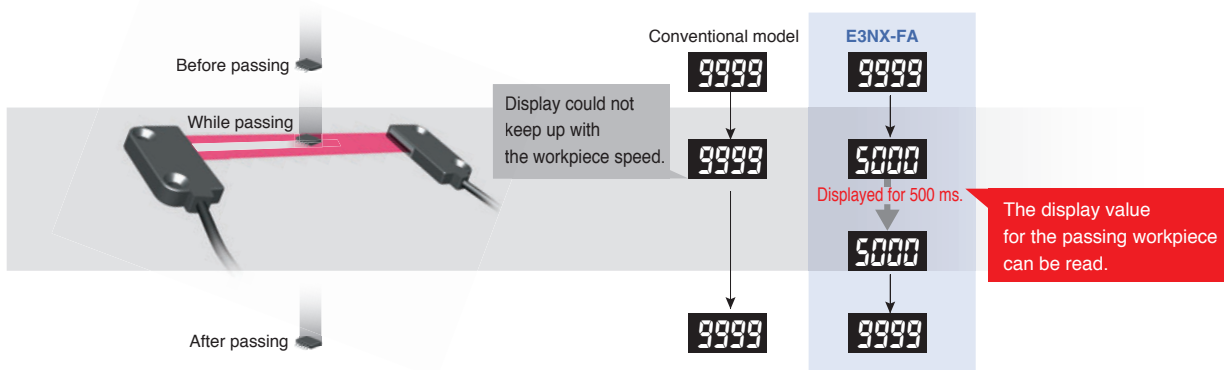

Point




Advanced DPC (Dynamic Power Control) **PAT**

## Predictive maintenance to reduce downtime

An alarm output\* has been added to the DPC that automatically compensates for differences in the incident light level. A maintenance signal is output when the incident level drops due to dirt or vibration.

\*An alarm output is supported only on models with two outputs.

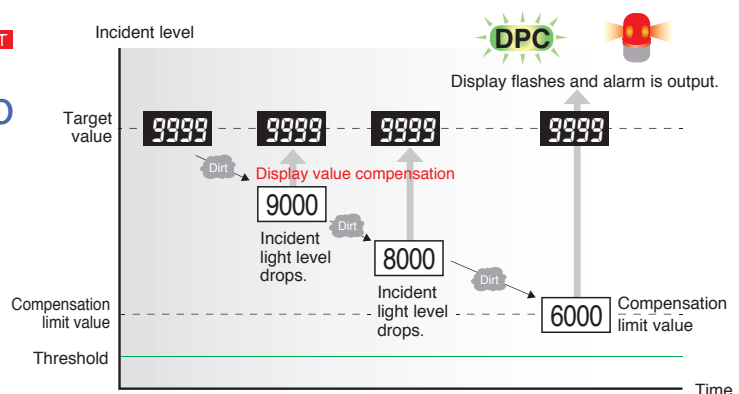



# N-Smart

Introduction to the  
N-Smart Series

The IoT platform that enables you to see, complete a lineup, and deliver

Winner of the good  
design award

**N-Smart Amplifier Units**  
Easy application with consistent operating procedures.

**E3NX-FA**  
Fiber amplifier units  
Stable detection with the No. 1 performance\*

**E3NX-CA**  
Color fiber amplifier unit  
High color discrimination capability

**E3NC**  
Smart laser sensors  
From minute workpieces to long-distance detection

**E3NX-MA**  
Smart fiber amplifier units (dual-channel models)  
Space-saving and high performance

**E3NW**  
Sensor communications units

**E9NC-T**  
Contact-type smart sensor  
Handles advanced measurement applications

**E2NC**  
Smart proximity sensor  
High-precision sensitivity setting is easy.

**Available soon**  
**E9NC-AA/VA**  
Smart condition monitoring amplifier  
Various condition-monitoring sensors are connected.

**Applications with many sensors:**  
More convenience and even lower costs with a network.

**EtherCAT**  
**CC-Link V2**

**N-Smart**  
Presence / Detection / Measurement

## Common features and models in the N-Smart Series

Common buttons

Intuitive operation  
and easy setup



White characters on a black background

High-contrast displays  
for easy visibility from a  
distance

Models with wire-saving connectors

Popular

No master/slave distinctions in  
amplifier units

### • Reduce model numbers in stock


You do not need to stock both master and slave amplifier units.

### • Greatly reduced wiring work

Power is supplied from the master connector. Slave connectors have only output lines.

### • Expansion is easy and reliable

Mutual interference prevention works even if you use a master connector instead of a slave connector or combine them with pre-wired models.

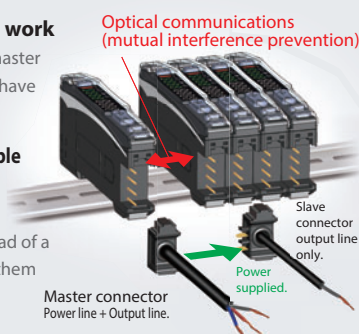

Model for sensor communications unit

Data management and time reduction with  
network communications

### • Three communications methods are supported

### • Use distributed sensor units to reduce equipment production costs and commissioning time



**EtherCAT**  
**CompoNet**  
**CC-Link V2**

## Ordering Information

### Fiber Amplifier Units (Dimensions → pages 10 and 11)

Type	Connecting method	Appearance	Inputs/outputs	Model	
				NPN output	PNP output
Standard models	Pre-wired (2 m)		1 output	<b>E3NX-FA11 2M</b> CE, cULus	<b>E3NX-FA41 2M</b> CE, cULus
	Wire-saving Connector		1 output	<b>E3NX-FA11-5 2M</b> CE <b>NEW</b> *1	---
Advanced models	Pre-wired (2 m)		2 outputs + 1 input	<b>E3NX-FA21 2M</b> CE, cULus	<b>E3NX-FA51 2M</b> CE, cULus
	Wire-saving Connector		1 output + 1 input	<b>E3NX-FA7</b> CE, cULus	<b>E3NX-FA9</b> CE, cULus
			2 outputs	<b>E3NX-FA7TW</b> CE, cULus	<b>E3NX-FA9TW</b> CE, cULus
	M8 Connector		1 output + 1 input	<b>E3NX-FA24</b> CE, cULus	<b>E3NX-FA54</b> CE, cULus
			2 outputs	---	<b>E3NX-FA54TW</b> CE, cULus
Infrared models	Pre-wired (2 m)		1 output	<b>E3NX-FAH11 2M</b> CE <b>NEW</b>	<b>E3NX-FAH41 2M</b> CE <b>NEW</b>
	Wire-saving Connector		1 output	<b>E3NX-FAH6</b> CE <b>NEW</b>	<b>E3NX-FAH8</b> CE <b>NEW</b>
Analog output models	Pre-wired (2 m)		2 outputs	<b>E3NX-FA11AN 2M</b> CE <b>NEW</b>	<b>E3NX-FA41AN 2M</b> CE <b>NEW</b>
Model for Sensor Communications Unit *2	Connector for Sensor Communications Unit		---	<b>E3NX-FA0</b> CE, cULus	
				<b>E3NX-FAH0</b> CE	<b>NEW</b>





\*1. This type can prevent mutual interference for two units in the SHS2 mode.

\*2. A Sensor Communications Unit is required if you want to use the Fiber Amplifier Unit on a network.

## Accessories (Sold Separately)



### Wire-saving Connectors (Required for models for Wire-saving Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately. Note: Protective stickers are provided.

Type	Appearance	Cable length	No. of conductors	Model	Applicable Fiber Amplifier Units
Master Connector		2 m	4	E3X-CN21	E3NX-FA7 E3NX-FA7TW E3NX-FA9 E3NX-FA9TW  CE, cULus
Slave Connector			2	E3X-CN22	
Master Connector			3	E3X-CN11	E3NX-FA6 E3NX-FA8  CE, cULus
Slave Connector			1	E3X-CN12	


### Sensor I/O Connectors (Required for models for M8 Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately.

Size	Cable	Appearance	Cable type	Model
M8	Standard cable	Straight 	2m	XS3F-M421-402-A
			5m	XS3F-M421-405-A
		L-shaped 	2m	XS3F-M422-402-A
			5m	XS3F-M422-405-A


### Mounting Bracket

A Mounting Bracket is not provided with the Fiber Amplifier Unit. It must be ordered separately as required.

Appearance	Model	Quantity
	E39-L143	1


### DIN Track

A DIN Track is not provided with the Fiber Amplifier Unit. It must be ordered separately as required.

Appearance	Type	Model	Quantity
	Shallow type, total length: 1 m	PFP-100N	1
	Shallow type, total length: 0.5 m	PFP-50N	
	Deep type, total length: 1 m	PFP-100N2	


### End Plate

Two End Plates are provided with the Sensor Communications Unit. End Plates are not provided with the Fiber Amplifier Unit. They must be ordered separately as required.

Appearance	Model	Quantity
	PFP-M	1





### Cover

Attach these Covers to Amplifier Units. Order a Cover when required, e.g., if you lose the covers.

Appearance	Model	Quantity
	E39-G25 FOR E3NX-FA <b>NEW</b>	1

## Related Products

### Sensor Communications Units

Type	Appearance	Model
Sensor Communications Unit for EtherCAT		E3NW-ECT
Sensor Communications Unit for CompoNet		E3NW-CRT *1
Sensor Communications Unit for CC-Link		E3NW-CCL
Distributed Sensor Unit *2		E3NW-DS

Refer to your OMRON website for details.

\*1. Only E3NX-FA0 can be connected to E3NW-CRT.

\*2. The Distributed Sensor Unit can be connected to any of the Sensor Communications Units.

EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

CompoNet is a registered trademark of the ODVA. CC-Link is a registered trademark of Mitsubishi Electric Corporation. The trademark is managed by the CC-Link Partner Association.

# Ratings and Specifications

## Standard models/ Advanced models/ Infrared models

Item	Type	Standard models			Advanced models					Infrared models		
	NPN output	E3NX-FA11	E3NX-FA6	E3NX-FA11-5*1	E3NX-FA21	E3NX-FA7	E3NX-FA7TW	E3NX-FA24	---	E3NX-FAH11	E3NX-FAH6	
	PNP output	E3NX-FA41	E3NX-FA8	---	E3NX-FA51	E3NX-FA9	E3NX-FA9TW	E3NX-FA54	E3NX-FA54TW	E3NX-FAH41	E3NX-FAH8	
	Connecting method	Pre-wired	Wire-saving Connector	Pre-wired	Pre-wired	Wire-saving Connector		M8 Connector		Pre-wired	Wire-saving Connector	
Inputs/ outputs	Outputs	1 output			2 outputs	1 output	2 outputs	1 output	2 outputs	1 outputs		
	External inputs	---			1 input	1 input	---	1 input	---	---		
Light source (wavelength)		Red, 4-element LED (625 nm)									Infrared LED (870nm)	
Power supply voltage		10 to 30 VDC, including 10% ripple (p-p)										
Power consumption *2		At Power supply voltage of 24 VDC Standard Models: Normal mode : 840 mW max. (Current consumption at 35 mA max.) Eco function ON: 650 mW max. (Current consumption at 27 mA max.) Eco function LO : 750 mW max. (Current consumption at 31 mA max.)										
		Advanced Models or Model for Sensor Communications Unit: Normal mode : 920 mW max. (Current consumption at 38 mA max.) Eco function ON: 680 mW max. (Current consumption at 28 mA max.) Eco function LO : 800 mW max. (Current consumption at 33 mA max.)										
		Infrared models: Normal mode : 1080 mW max. (Current consumption at 45 mA max.) Eco function ON: 920 mW max. (Current consumption at 38 mA max.) Eco function LO : 1020 mW max. (Current consumption at 42 mA max.)										
Control output		Load power supply voltage: 30 VDC max., open-collector output (depends on the NPN/PNP output format) Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 30 Amplifier Units: 20 mA max.										
		<div><div>Residual voltage:</div><div>At load current of less than 10 mA: 1 V max. At load current of 10 to 100 mA: 2 V max.</div></div> OFF current: 0.1 mA max.										
Response time	Super-high-speed mode (SHS)	Operate or reset for model with 1 output: 30 μs (Super High Speed mode (SHS2) of E3NX-FA11-5 is 60 μs each), with 2 outputs: 32 μs										
	High-speed mode (HS)	Operate or reset: 250 μs										
	Standard mode (Stnd)	Operate or reset: 1 ms										
	Giga-power mode (GiGA)	Operate or reset: 16 ms										
Maximum connectable Units		30										
No. of Units for mutual interference prevention *3	Super-high-speed mode (SHS)	0 <b>Note:</b> 2 units when the detection mode is set to Super High Speed mode (SHS2), and for other models, the mutual interference prevention function is disabled.										
	High-speed mode (HS)	10										
	Standard mode (Stnd)	10										
	Giga-power mode (GiGA)	10										
Functions		Auto power control (APC), dynamic power control (DPC), timer, zero reset, resetting settings, eco mode, bank switching, power tuning, and hysteresis width										

## Analog output models/ Model for Sensor Communications Unit

Item		Type	Analog output models	Model for Sensor Communications Unit	
		NPN output	E3NX-FA11AN	E3NX-FA0	E3NX-FAH0
		PNP output	E3NX-FA41AN		
		Connecting method	Pre-wired	Connector for Sensor Communications Unit	
Inputs/ outputs	Outputs	2 outputs	--- *1	--- *1	
	External inputs	---			
Light source (wavelength)		Red, 4-element LED (625 nm)			Infrared LED (870nm)
Power supply voltage		10 to 30 VDC, including 10% ripple (p-p)		Supplied from the connector through the communication units.	
Power consumption *2		At Power supply voltage of 24 VDC Normal mode : 960 mW max. (Current consumption at 40 mA max.) Eco function ON: 770 mW max. (Current consumption at 32 mA max.) Eco function LO : 870 mW max. (Current consumption at 36 mA max.)		At Power supply voltage of 24 VDC Normal mode : 920 mW max. (Current consumption at 38 mA max.) Eco function ON: 680 mW max. (Current consumption at 28 mA max.) Eco function LO : 800 mW max. (Current consumption at 33 mA max.)	At Power supply voltage of 24 VDC Normal mode : 1,080 mW max. (Current consumption at 45 mA max.) Eco function ON: 920 mW max. (Current consumption at 38 mA max.) Eco function LO : 1,020 mW max. (Current consumption at 42 mA max.)
Control output		Load power supply voltage: 30 VDC max., open-collector output (depends on the NPN/PNP output format) Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 30 Amplifier Units: 20 mA max. <div><div>Residual voltage:</div><div>At load current of less than 10 mA: 1 V max. At load current of 10 to 100 mA: 2 V max.</div></div> OFF current: 0.1 mA max.		---	
Analog output		Voltage output: 1-5 VDC (10 kΩ or more connected load), temperature characteristics: 0.3% F.S. / °C		---	
Control output Response time	Super-high-speed mode (SHS)	Operate or reset: 80 μs		Operate or reset: 32 μs	
	High-speed mode (HS)	Operate or reset: 250μs		Operate or reset: 250 μs	
	Standard mode (Std)	Operate or reset: 1 ms		Operate or reset: 1 ms	
	Giga-power mode (GiGA)	Operate or reset: 16 ms		Operate or reset: 16 ms	
Maximum connectable Units		30		With E3NW-ECT: 30 units (When connected to an OMRON NJ-series Controller.) With E3NW-CRT: 16 units (Note: E3NX-FAH0 can not be connected.) With E3NW-CCL: 16 units	
No. of Units for mutual interference prevention *3	Super-high-speed mode (SHS)	0 (The mutual interference prevention function is disabled if the detection mode is set to super-high-speed mode.)			
	High-speed mode (HS)	10			
	Standard mode (Std)	10			
	Giga-power mode (GiGA)	10			
Functions		Auto power control (APC), dynamic power control (DPC), timer, zero reset, resetting settings, eco mode, bank switching, power tuning, and hysteresis width			

\* Refer to E3NX-FA/ Fiber Amplifier on your OMRON website for details.

\*1. Two sensor outputs are allocated in the programmable logic controller PLC I/O table.  
PLC operation via Communications Unit enables reading detected values and changing settings.

\*2. At Power supply voltage of 10 to 30 VDC  
Analog output models:  
Normal mode : 1,080 mW max. (Current consumption: 36 mA max. at 30 VDC, 75 mA max. at 10 VDC)  
Eco function ON : 840 mW max. (Current consumption: 28 mA max. at 30 VDC, 55 mA max. at 10 VDC)  
Eco function LO : 960 mW max. (Current consumption: 32 mA max. at 30 VDC, 65 mA max. at 10 VDC)


\*3. The tuning will not change the number of units.  
The least unit count among the mutual interference prevention units of E3NX and E3NC.  
Check the mutual interference prevention unit count and response speed of each model.








## Fiber Amplifier Units

**Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.**


E3NX-FA□1(-5)  
E3NX-FAH□1  
E3NX-FA□AN

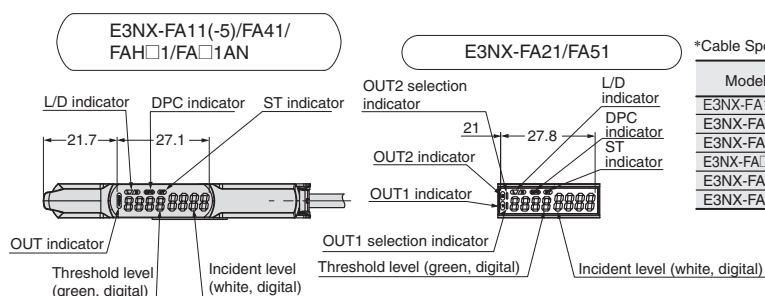






Model	Outer diameter	No. of conductors	Others
E3NX-FA11(-5)	4.0 dia.	3	Conductor cross-section: 0.2 mm <sup>2</sup> Insulator dia.: 0.9 mm Standard cable length: 2 m Minimum bending radius: 12 mm
E3NX-FA41			
E3NX-FAH□1			
E3NX-FA□1AN			
E3NX-FA21	4.0 dia.	5	
E3NX-FA51			

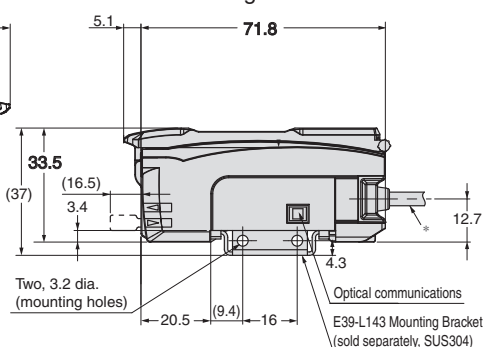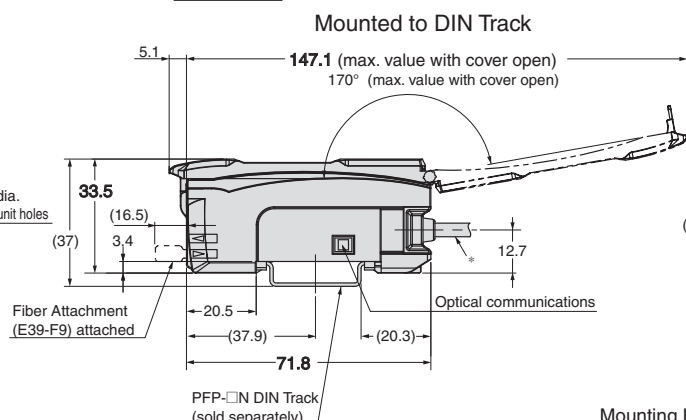

E3NX-FA6  
E3NX-FA7(TW)  
E3NX-FA8  
E3NX-FA9(TW)  
E3NX-FAH6  
E3NX-FAH8

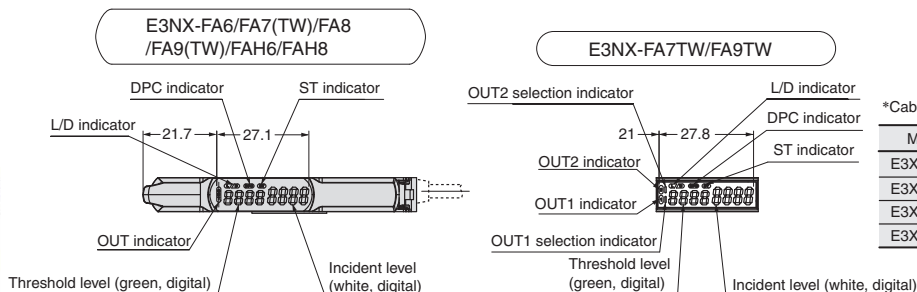

Model	Outer diameter	No. of conductors
E3X-CN12	2.6 dia.	1
E3X-CN22	4.0 dia.	2
E3X-CN11		3
E3X-CN21		4

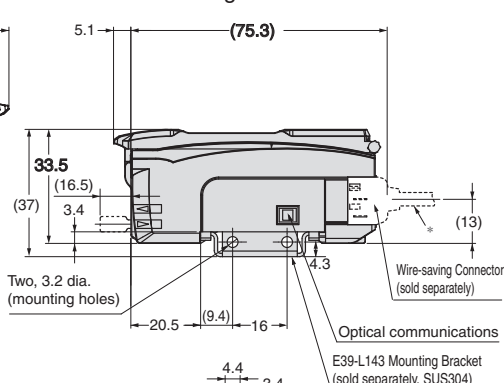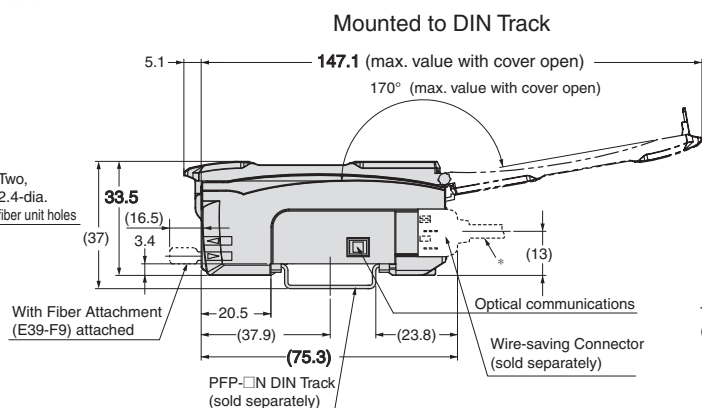


## Amplifier Units with M8 Connectors

E3NX-FA24



E3NX-FA54

E3NX-FA54TW

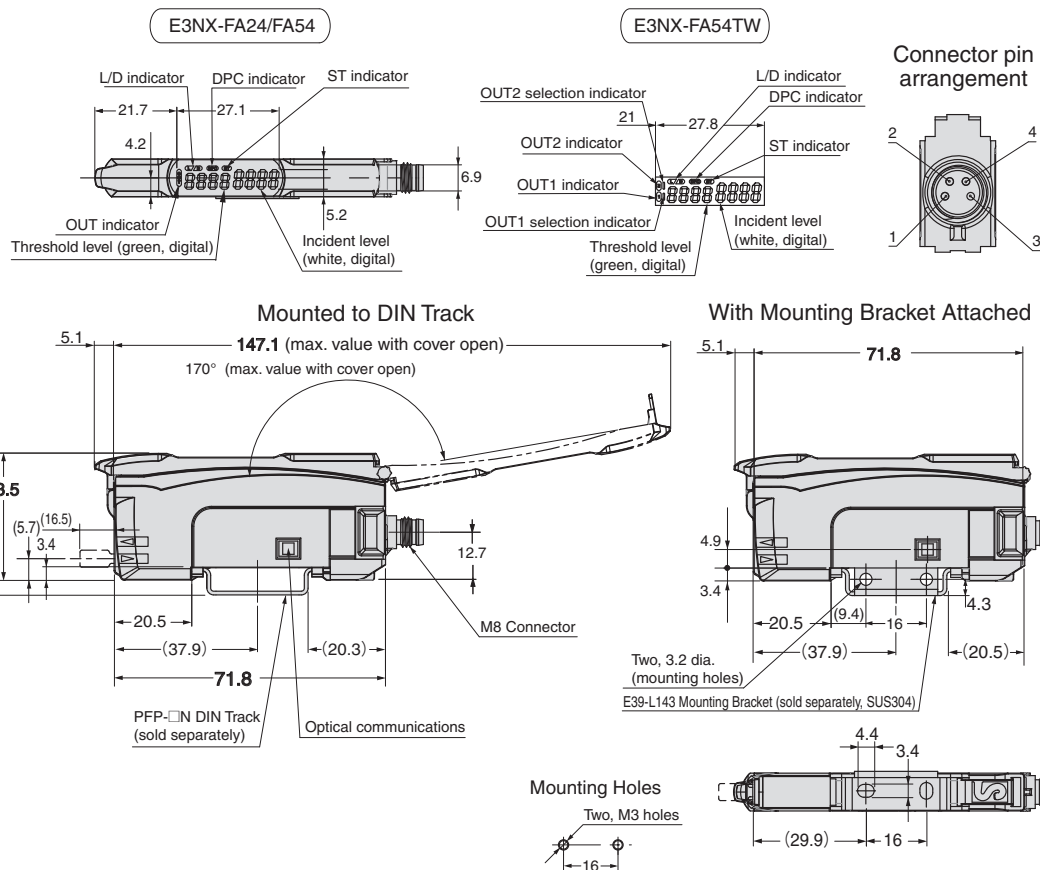

## Amplifier Unit with Connector for Sensor Communications Unit

E3NX-FA0/FAH0

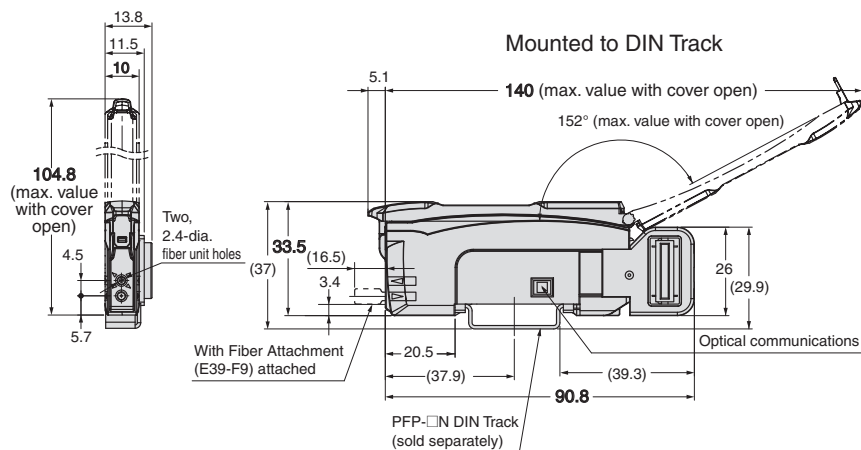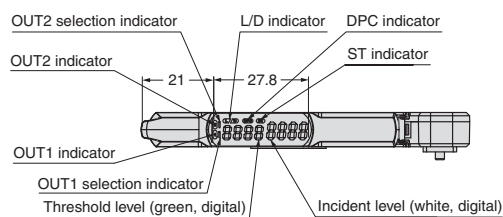

## NEW Introduction to New Fiber Units

A New Standard: Built-in **Lens** Series

Hex Shape

**E32-LT11N**  
**E32-LD11N**




Straight Type

**E32-LT11 (R)**  
**E32-LD11 (R)**



Flat Models

**E32-LT35Z**

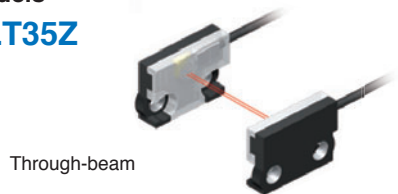

Oil-resistant

**E32-T11NF**



## Fiber Sensor Best Selection Catalog

Refer to the Fiber Sensor Best Selection Catalog for information on the above Fiber Units and detailed information on the E3NX-FA.

Cat. No. E44I-E-02



**OMRON AUTOMATION AMERICAS HEADQUARTERS** • Chicago, IL USA • 847.843.7900 • 800.556.6766 • [www.omron247.com](http://www.omron247.com)

**OMRON CANADA, INC. • HEAD OFFICE**

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • [www.omron247.com](http://www.omron247.com)

**OMRON ELECTRONICS DE MEXICO • HEAD OFFICE**

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • [mela@omron.com](mailto:mela@omron.com)

**OMRON ELECTRONICS DE MEXICO • SALES OFFICE**

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • [mela@omron.com](mailto:mela@omron.com)

**OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE**

São Paulo, SP, Brasil • 55.11.2101.6300 • [www.omron.com.br](http://www.omron.com.br)

**OMRON ARGENTINA • SALES OFFICE**

Cono Sur • 54.11.4783.5300

**OMRON CHILE • SALES OFFICE**

Santiago • 56.9.9917.3920

**OTHER OMRON LATIN AMERICA SALES**

54.11.4783.5300

**OMRON EUROPE B.V.** • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • [www.industrial.omron.eu](http://www.industrial.omron.eu)

*Authorized Distributor:*

**Controllers & I/O**

- Machine Automation Controllers (MAC) • Motion Controllers
- Programmable Logic Controllers (PLC) • Temperature Controllers • Remote I/O

**Robotics**

- Industrial Robots • Mobile Robots

**Operator Interfaces**

- Human Machine Interface (HMI)

**Motion & Drives**

- Machine Automation Controllers (MAC) • Motion Controllers • Servo Systems
- Frequency Inverters

**Vision, Measurement & Identification**

- Vision Sensors & Systems • Measurement Sensors • Auto Identification Systems

**Sensing**

- Photoelectric Sensors • Fiber-Optic Sensors • Proximity Sensors
- Rotary Encoders • Ultrasonic Sensors

**Safety**

- Safety Light Curtains • Safety Laser Scanners • Programmable Safety Systems
- Safety Mats and Edges • Safety Door Switches • Emergency Stop Devices
- Safety Switches & Operator Controls • Safety Monitoring/Force-guided Relays

**Control Components**

- Power Supplies • Timers • Counters • Programmable Relays
- Digital Panel Meters • Monitoring Products

**Switches & Relays**

- Limit Switches • Pushbutton Switches • Electromechanical Relays
- Solid State Relays

**Software**

- Programming & Configuration • Runtime