

Digital Timer
H5CC

OMRON

Upgraded Design with a User-Friendly Interface

5 | in one



Highly Integrated Digital Timer with a Wide Range of Functionality

The H5CC series improves user interaction with a friendly interface and predictive maintenance features, visual clarity through a white LCD screen and improved status indicators in both keys and display.

Bright white LCD Screen

makes it easier to read values from a distance.

Status indicators integrated

into the front buttons to maximize visual clarity and visibility.



Status can be indicated by the ratio of present value or the measurement value to the set value.




Three indicators light up when the status reaches 50%




All indicators light up when the status reaches 100%


Example of LCD Screen



OFF Time range




ON Time range



Timer mode

Safety and reliability through isolated circuits

Power supply circuit and input circuits are isolated, removing issues of incorrect wiring.


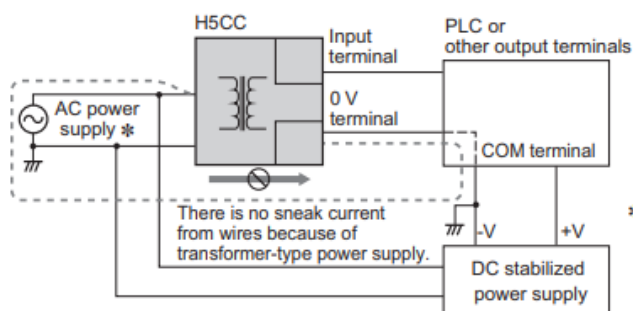


* Grounding of AC power supply implies grounding at the commercial power supply side.

Replacement Time Notification Function Alerts the user to Potential Maintenance Needs


When the timer's service life is reaching its end, there's a deterioration of the electrolytic capacitors and the relay output count.

In addition to the relay output count, an alarm is displayed when said deterioration reaches a standard value and a planned maintenance is supported.

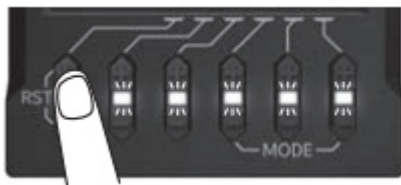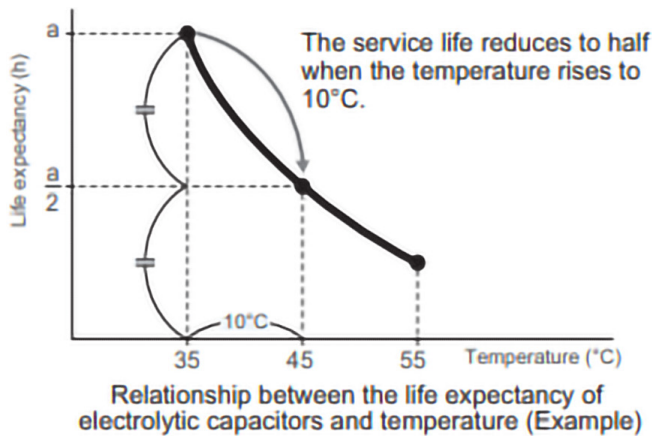


Reset Operation

Capability to prevent operational error through reset.

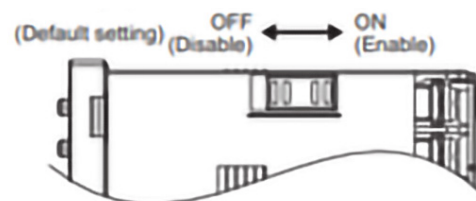

Key Protect Switch

Avoid unwanted inputs through key protection



Sustainability through thinner design inside a control panel

Body depth of all models with screw terminals has been reduced compared to previous models, contributing to downsizing control panels and reducing footprint.

Part Numbers

OMRON

Type	Time Ranges	Operating modes	External connections	Inputs	Outputs	Power supply voltage	Models
H5CC-A	0.001 to 999.999 s 0.01 to 9999.99 s 0.1 to 99999.9 s 1 to 999999 s 1s to 99 h 59 min 59 s 0.1 to 999999.9 min 1 to 999999 min 1 min to 9999 h 59 min 0.1 to 999999.9 h 1 to 999999 h	A: Signal ON Delay I F-1: Cumulative (Timer does not reset when power comes ON.)	Screw terminal blocks	Signal, Reset, Gate (NPN/PNP inputs)	Transistor output (DPST)	12 to 48 VDC/ 24 VAC	H5CC-AWSD
		<Timer Mode> A: Signal ON delay I A-1: Signal ON delay II A-2: Power ON delay I A-3: Power ON delay II b: Flicker I b-1: Flicker II b-5: One-shot flicker C: Signal ON/OFF delay I d: Signal OFF delay I E: Interval F: Cumulative G: Signal ON/OFF delay II H: Signal OFF delay II Z: ON/OFF-duty-adjustable flicker S: Stopwatch <Twin Timer Mode> toff: Flicker OFF start I ton: Flicker ON start I toff-1: Flicker OFF start II ton-1: Flocker ON start II	Screw terminal blocks	Signal, Reset, Gate (NPN/PNP inputs)	Contact output (time-limit SPDT)	100 to 240 VAC	H5CC-A
					Transistor ouput (SPST)	12 to 48 VDC/ 24 VAC	H5CC-AD
						100 to 240 VAC	H5CC-AS
					Contact output (time-limit SPDT) + transistor output (SPST)	12 to 48 VDC/ 24 VAC	H5CC-ASD
			100 to 240 VAC			H5CC-AU	
			Contact output (time-limit SPDT)		12 to 48 VDC/ 24 VAC	H5CC-AUD	
					100 to 240 VAC	H5CC-A11	
					12 to 48 VDC/ 24 VAC	H5CC-A11D	
				100 to 240 VAC	H5CC-A11S		
			Transistor ouput (SPST)	12 to 48 VDC/ 24 VAC	H5CC-A11SD		
		12 to 48 VDC/ 24 VAC		H5CC-A11F			
H5CC-L		<Timer Mode> A-2: Power ON delay I b: Flicker I E: Interval Z: ON/OFF-duty-adjustable flicker <Twin Timer Mode> toff: Flicker OFF start I ton: Flicker ON start I	8-pin socket	Signal, Reset (NPN inputs)	Contact ouput (time-limit SPDT)	100 to 240 VAC	H5CC-L8
						12 to 48 VDC/ 24 VAC	H5CC-L8D
					Transistor ouput (SPST)	100 to 240 VAC	H5CC-L8S
						12 to 48 VDC/ 24 VAC	H5CC-L8SD
				None	Contact output (time-limit SPDT + instantaneous SPDT) Models with instantaneous contact outputs	100 to 240 VAC	H5CC-L8E
						12 to 48 VDC/ 24 VAC	H5CC-L8ED
		12 to 48 VDC/ 24 VAC	H5CC-L8EF				

Soft Cover

Y92A-48F1



Hard Cover

Y92A-48



OMRON AUTOMATION AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • automation.omron.com

OMRON CANADA, INC. • HEAD OFFICE
Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • automation.omron.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE
Ciudad de México • 52.55.5901.4300 • 01.800.386.6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE
San Pedro Garza García, N.L. • 81.12.53.7392 • 01.800.386.6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE
Eugenio Garza Sada, León, Gto • 01.800.386.6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE
São Paulo, SP, Brasil • 55 11 5171-8920 • automation.omron.com

OMRON ARGENTINA • SALES OFFICE
Buenos Aires, Argentina • +54.11.4521.8630 • +54.11.4523.8483
mela@omron.com

OTHER OMRON LATIN AMERICA SALES
+54.11.4521.8630 • +54.11.4523.8483 • mela@omron.com